



Stock
Product
Catalog

*Toilet
Partition
Hardware*

Door Hardware HC Inswing 1 Door 1-14 Post Polished Chrome Zamac SKU#108220



Door Hardware In-swing - 1 door 1-14 Post Polished Chrome Zamac SKU# 611900



Door Hardware Outswing - 1 Door 1-14 Post Chrome Zamac SKU# 621900



Door Hardware LH-OUT 1 Door and Post 7978 For Solid Plastic Partition Outswing
SKU# 72688



Door Hardware (LH-IN) 1 Door and Post (7988) For Solid Plastic Partition Inswing
SKU# 72668




Door Hardware LH-IN 34 Door and Post 7103 For Solid Phenolic Partition Ins-wing
SKU# 620169



Door Hardware LH-OUT 34 Door and Post 7093 For Solid Phenolic Partition Out-swing

SKU # 620189

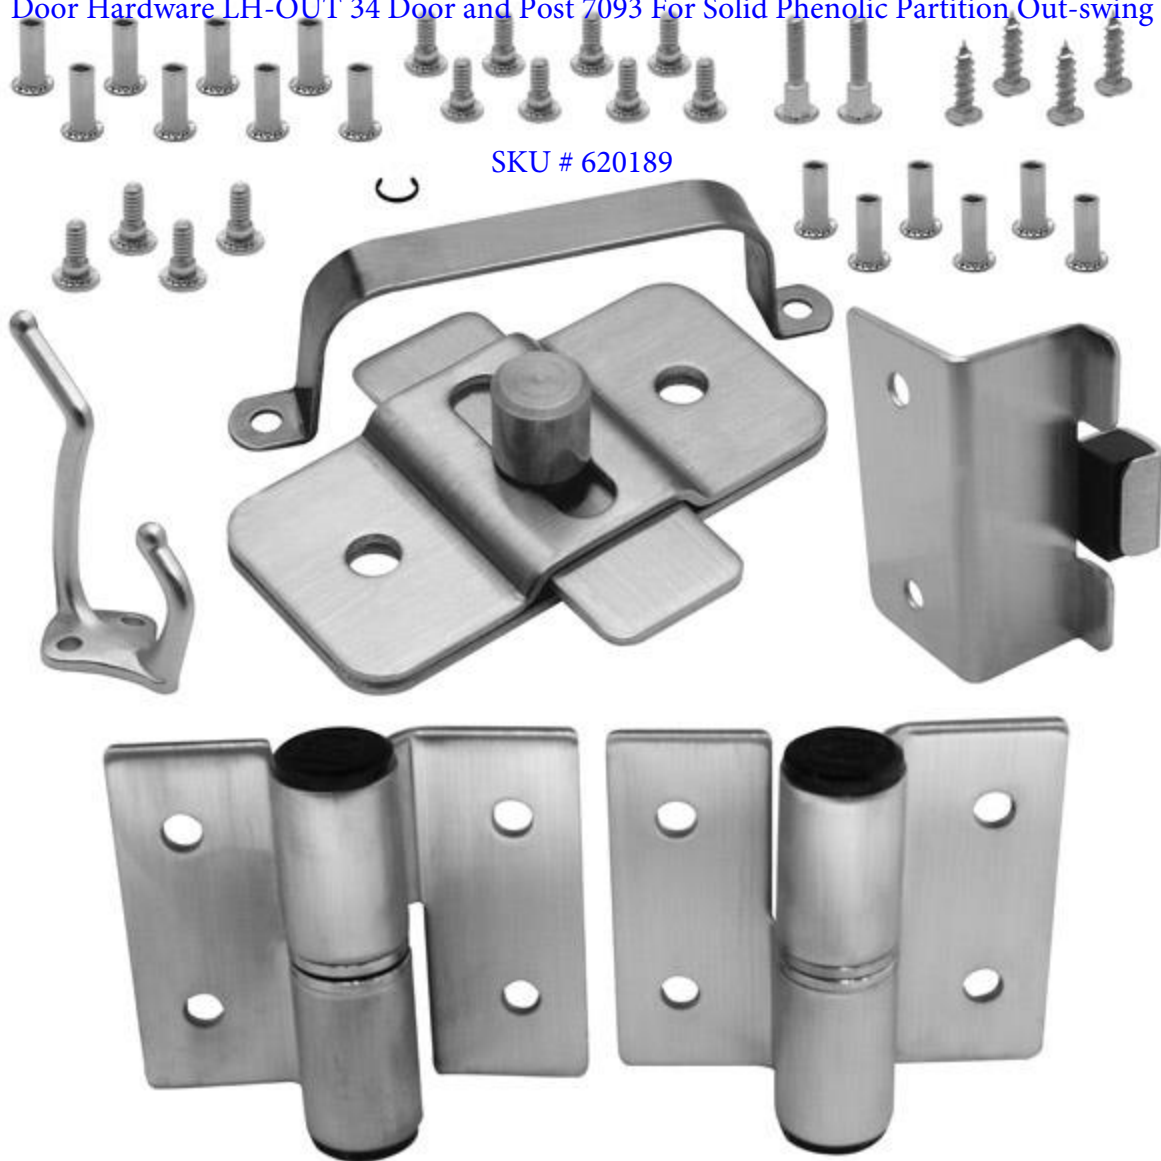

Pilaster Shoe 1-1.4



Sizes - 4"/6"/8"/10"/12"

Pilaster Shoe - 1"



Sizes - 3"/4"/6"/8"/10"/12"

1750 WALL BRACKET TWO EAR 1"



1760 WALL BRACKET ONE EAR 1"



1910 U-BRACKET 1"



T-27 Torx Bit 6 Lobe Fasteners SKU # 127333



T-20 Torx Bit 6 Lobe Fasteners SKU# 127343



Screw Pack 3/4" Thru Bolt - Barrell and Screw (8-Pack)



Screw Pack 1" Thru Bolt - Barrell and Screw (10-Pack)




8925 ONE-WAY SCREW REMOVER - SIZE
#8-10



Bobrick Toilet Accessories

Bobrick Toilet Accessories


B- 262

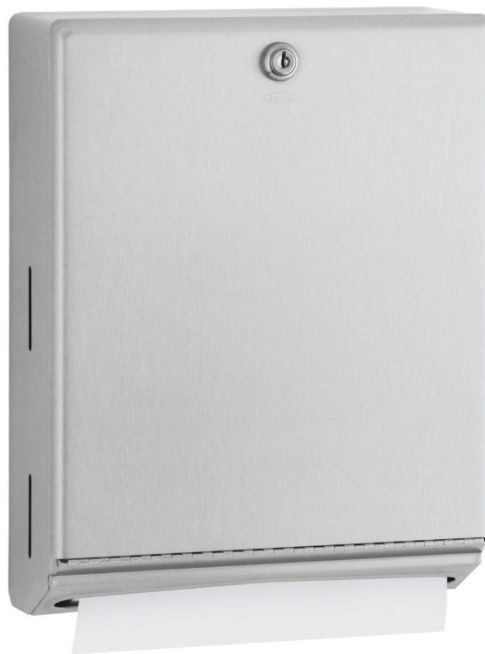

ClassicSeries®
SURFACE-MOUNTED
PAPER TOWEL DISPENSER



Technical Data

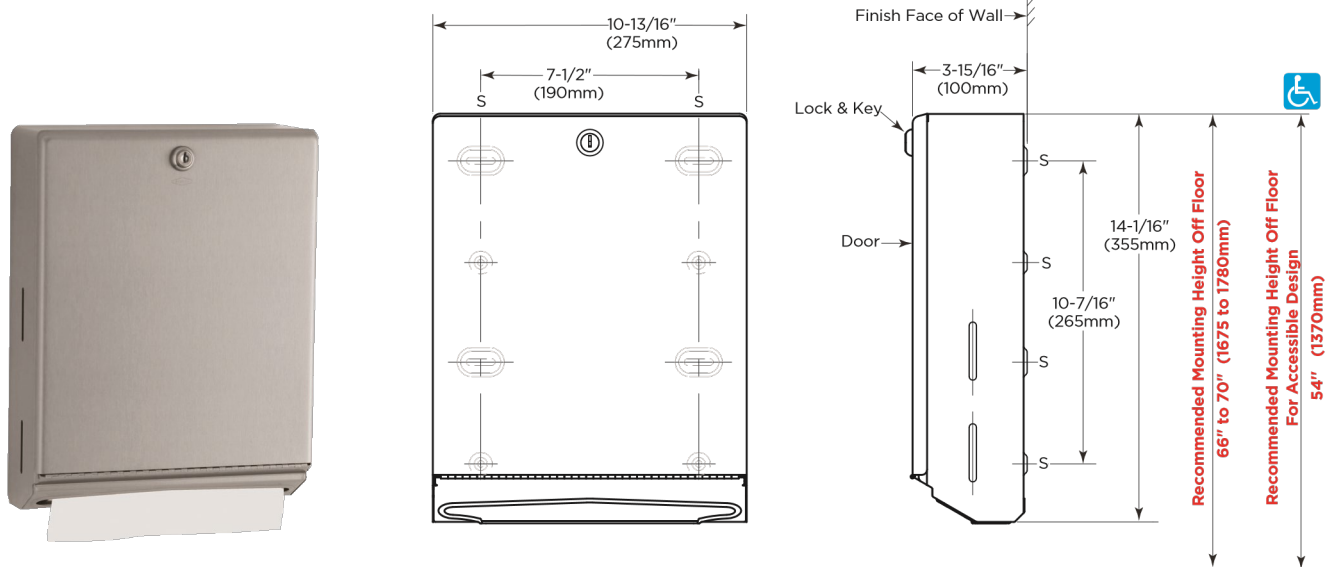

MATERIALS:

Cabinet — 18-8, type-304, 22-gauge (0.8mm) stainless steel. All-welded construction. Exposed surfaces have satin finish. Towel tray has hemmed opening to dispense paper towels without tearing.

Door — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Secured to cabinet with a full-length stainless steel piano-hinge. Equipped with a tumbler lock keyed like other Bobrick washroom accessories.

Optional: Order Bobrick Part No. 262-130 TowelMate® available as an optional accessory. TowelMate accessory allows for paper towels to dispense one at a time without bulging, sagging or falling through the towel tray opening.

TowelMate fits Gamco and most manufacturers' similar models.

OPERATION:

Unit dispenses C-fold and multifold paper towels 3-1/8" to 3-13/16" (79–97mm) deep. Slots in sides of cabinet indicate refill time. Capacity: 400 C-fold or 525 multifold paper towels. To dispense narrower towels 2-1/2" to 3-1/8" (64–79mm) deep, order optional TowelMate accessory Bobrick Part No. 262-130.

INSTALLATION:

Mount unit on wall with four #10 x 1-1/4" (4.8 x 32mm) sheet-metal screws (not furnished) at four of the eight mounting holes indicated by an S (top slots and bottom holes preferable). For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure with sheet-metal screws. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 1/8" (3mm) toggle bolts or expansion bolts.

SPECIFICATION:

Surface-mounted paper towel dispenser shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Door shall be secured to cabinet with a full-length stainless steel piano-hinge and equipped with a tumbler lock keyed like other Bobrick washroom accessories. Paper towel tray shall have hemmed opening to dispense paper towels without tearing. Unit shall be capable of dispensing 400 C-fold or 525 multifold paper towels measuring 3-1/8" to 3-13/16" (79 to 97mm) deep. Narrower paper towels 2-1/2" to 3-1/8" (65 to 79mm) deep may be efficiently dispensed with the use of an optional TowelMate accessory, Bobrick Part No. 262-130.

TowelMate accessory allows for paper towels to dispense one at a time without bulging, sagging or falling through the towel tray opening.

Surface-Mounted Paper Towel Dispenser shall be Model B-262 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.


B-270



ConturaSeries®
SURFACE-MOUNTED
SANITARY NAPKIN DISPOSAL



Technical Data

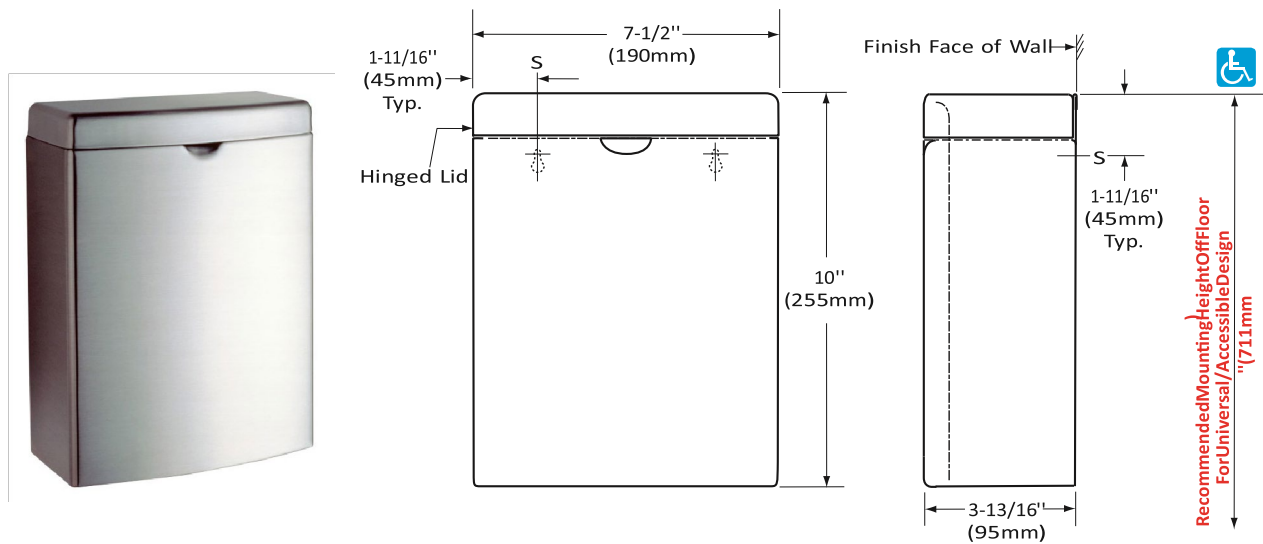

MATERIALS:

Container — 18-8, type-304, 22-gauge (0.8mm) stainless steel. All-welded construction. Exposed surfaces have satin finish. Integral finger depression for opening cover. Front of container has same degree of arc as front of cover and other Bobrick ConturaSeries washroom accessories. Radius on side edges of container match corners and edges of cover and other ConturaSeries accessories.

Cover — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Drawn, one-piece, seamless construction. Front of cover has same degree of arc as front of container and other Bobrick Contura Series washroom accessories. Radius on corners and edges of cover match side edges of container and other Contura Series accessories. Secured to container with a full-length stainless steel piano-hinge.

OPERATION:

Cover flips up for disposal of sanitary napkins and for servicing container.

INSTALLATION:

For partitions with particle-board or other solid core, secure with two #8 x 3/4" (4.2 x 19mm) sheet-metal screws (not furnished) at all points indicated by an S, or provide through-bolts, nuts, and washers.

For hollow-core metal partitions, provide solid backing into which sheet-metal screws can be secured. If two units are installed back-to-back, then provide threaded sleeves and machine screws for the full thickness of partition.

For masonry walls, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 3/16" (5mm) toggle bolts or expansion bolts.

For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws.

SPECIFICATION:

Surface-mounted sanitary napkin disposal shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Front of sanitary napkin disposal shall have same degree of arc and match other Bobrick ConturaSeries accessories in the washroom. Radius on corners and edges of sanitary napkin disposal shall complement other Bobrick ConturaSeries washroom accessories. Cover shall be drawn, one-piece, seamless construction and secured to container with a full-length stainless steel piano-hinge. Container shall have integral finger depression for opening cover.

Surface-Mounted Sanitary Napkin Disposal shall be Model B-270 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.


B-2888



**SURFACE-MOUNTED
MULTI-ROLL TOILET
TISSUE DISPENSER**



Technical Data

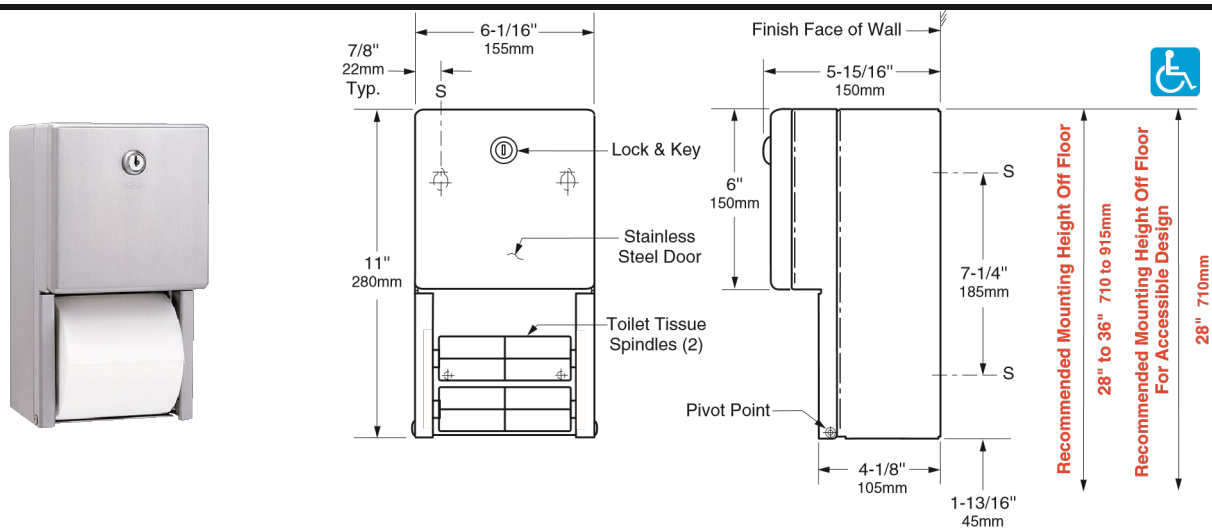

MATERIALS:

Cabinet — 18-8, type-304, 22-gauge (0.8mm) stainless steel. All-welded construction. Exposed surfaces have satin finish.

Door — 18-8, type-304, 22-gauge (0.8mm) stainless steel with 18-gauge (1.2mm) stainless steel door frame. Exposed surfaces have satin finish. Front of door is drawn, one-piece, seamless construction. Secured to cabinet with two rivets. Equipped with a tumbler lock keyed like other Bobrick washroom accessories.

Dispensing Mechanism, Inner Housing and Cam — 18-8, type-304, 18-gauge (1.2mm) stainless steel.

Spindles (2) — Heavy-duty, one-piece, molded ABS. Theft-resistant. Retained in dispensing mechanism when door is locked.

OPERATION:

Unit holds two standard-core toilet tissue rolls up to 5-1/4" (133mm) diameter (1800 sheets). Tissue rolls are loaded and locked into dispensing mechanism. Extra roll automatically drops in place when bottom roll is depleted. Depleted rolls can only be removed after unlocking door.

INSTALLATION:

For partitions with particleboard or other solid core, secure with four #10 x 5/8" (4.8 x 16mm) sheet-metal screws (not furnished) at points indicated by an S, or provide through-bolts, nuts, and washers.

For hollow-core metal partitions, provide solid backing into which sheet-metal screws can be secured. If two units are installed back-to-back, then provide threaded sleeves and machine screws for the full thickness of partition.

For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws.

For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws or provide 3/16" (5mm) toggle bolts or expansion bolts.

SPECIFICATION:

Surface-mounted multi-roll toilet tissue dispenser shall be type-304 stainless steel with all-welded construction, including dispensing mechanism, inner housing and cam; exposed surfaces shall have satin finish. Front of toilet tissue dispenser door shall be drawn, one-piece, seamless construction. Door shall be secured to cabinet with two rivets and equipped with a tumbler lock keyed like other Bobrick washroom accessories. Unit shall dispense two standard-core toilet tissue rolls up to 5-1/4" (133mm) diameter (1800 sheets). Extra roll shall automatically drop in place when bottom roll is depleted. Unit shall be equipped with two theft-resistant, heavy-duty, one-piece, molded ABS spindles.

Surface-Mounted Multi-Roll Toilet Tissue Dispenser shall be Model B-2888 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.

The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 4/27/11 Printed in U.S.A. The manufacturer reserves the right to, and does from time to time, make changes and improvements in designs and dimensions. © 2011 by Bobrick Washroom Equipment, Inc.

B-2111


Vertical



ClassicSeries®
SURFACE-MOUNTED SOAP DISPENSER



Technical Data

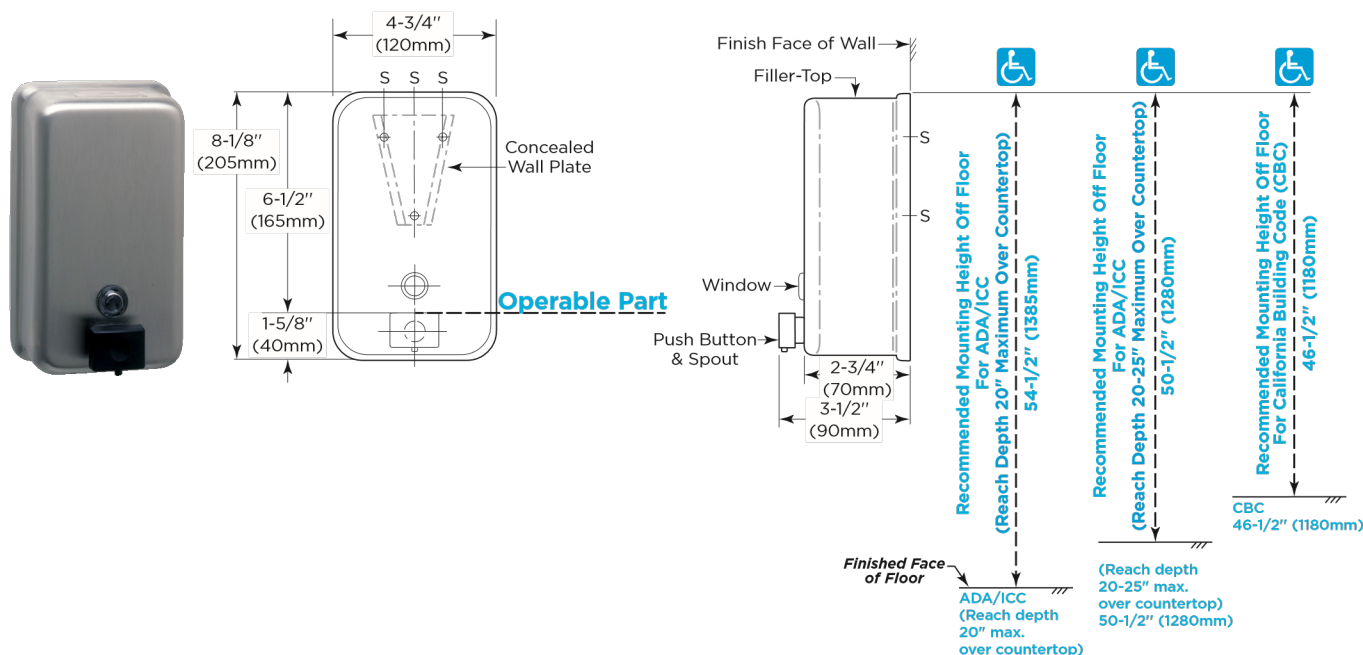

ADA/ICC

MATERIALS:

Container — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin-finish. Body is drawn, one-piece, seamless construction.

Back plate has mounting bracket attached. Furnished with concealed wall plate.

Equipped with a clear acrylic refill-indicator window and a locked, hinged stainless steel lid for top filling. Capacity: 40-fl oz (1.2-L).

Valve — Black molded plastic push button and spout. Soap head-holding mushroom valve. Stainless steel spring. U-packing seal and duckbill

Antibacterial-soap-resistant plastic cylinder.

OPERATION:

Corrosion-resistant valve dispenses commercially marketed all-purpose hand soaps. To prevent corrosion of the tank,

use only chloride-free pH-neutral liquid soaps. Valve is operable with one hand, without tight grasping, pinching, or twisting of the wrist,

and with less than 5 pounds of force (22.2 N) to comply with accessible design guidelines (including ADAAG in the U.S.A.). Window indicates when refill

is required. The locked, hinged lid opens for top filling only with special key provided. Concealed, vandal-resistant mounting.

INSTALLATION:

Secure wall plate to the wall with three sheet-metal screws, furnished by manufacturer, at points indicated by an S. Slide mounting bracket of container down onto wall plate and secure unit with furnished locking-screw. For plaster or dry wall construction, provide concealed backing to comply with local building codes and secure with sheet-metal screws furnished. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws furnished, or provide 1/8" (3mm) toggle bolts or expansion bolts.

Note: Surface-mount the dispenser plumb and true with valve 6" (150mm) to right or left of lavatory center. Provide 4" (100mm) minimum clearance from the lid to the underside of any horizontal projection. Push buttons should be located 44" (1120mm) maximum above the finish floor.

SPECIFICATION:

Surface-mounted soap dispenser shall be Type-304 stainless steel with satin-finish. Corrosion-resistant valve shall dispense commercially marketed all-purpose hand soaps, non-iodine based soaps and do not use alcohol based sanitizers.

To prevent corrosion of the tank, use only chloride-free pH-neutral liquid soaps. Valve shall be operable with one hand and with less than 5 pounds of force (22.2 N) to comply with accessible design guidelines (including ADAAG in the U.S.A.).

Container shall be equipped with a clear acrylic refill-indicator window; a locked, hinged stainless steel lid for top filling; and shall have a capacity of 40-fl oz (1.2-L). Unit shall have concealed, vandal-resistant mounting.

Surface-Mounted Soap Dispenser shall be Model B-2111 of Bobrick Washroom Equipment, Inc., Clifton

Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario

; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.

B-2112


Horizontal



ClassicSeries®
SURFACE-MOUNTED SOAP DISPENSER



Technical Data

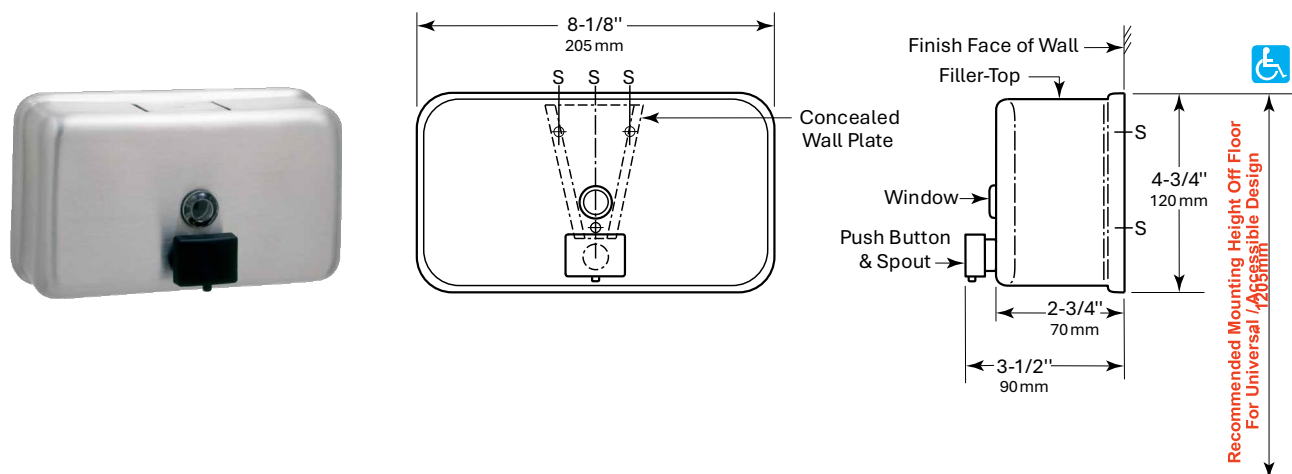

47-1/2

MATERIALS:

Container — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin-finish. Body is drawn, one-piece, seamless construction. Back plate has mounting bracket attached. Furnished with concealed wall plate. Equipped with a clear acrylic soap refill-indicator window and a locked, hinged stainless steel lid for top filling. Capacity: 40-fl oz (1.2-L).

Valve — Black molded plastic push button and spout. Soap head-holding mushroom valve. Stainless steel spring. U-packing seal and duckbill. Antibacterial-soap-resistant plastic cylinder.

OPERATION:

Corrosion-resistant valve dispenses commercially marketed all-purpose hand soaps. To prevent corrosion of the tank, use only chloride-free pH-neutral liquid soaps. Valve is operable with one hand, without tight grasping, pinching, or twisting of the wrist, and with less than 5 pounds of force (22.2 N) to comply with accessible design guidelines (including ADAAG in U.S.A.). Window indicates when refill is required. The locked, hinged lid opens for top filling only with special key provided. Concealed, vandal-resistant mounting.

INSTALLATION:

Secure wall plate to the wall with three sheet-metal screws, furnished by manufacturer, at points indicated by an *S*. Slide mounting bracket of container down onto wall plate and secure unit with furnished locking-screw. For plaster or dry wall construction, provide concealed backing to comply with local building codes and secure with sheet-metal screws furnished. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws furnished, or provide 1/8" (3mm) toggle bolts or expansion bolts.

Note: Surface-mount the dispenser plumb and true with valve 6" (150mm) to right or left of lavatory center. Provide 4" (100mm) minimum clearance from the lid to the underside of any horizontal projection. Push buttons should be located 44" (1120mm) maximum above the finish floor.

SPECIFICATION:

Surface-mounted soap dispenser shall be Type-304 stainless steel with satin-finish. Corrosion-resistant valve shall dispense commercially marketed all-purpose hand soaps, non-iodine based soaps and do not use alcohol based sanitizers. To prevent corrosion of the tank, use only chloride-free pH-neutral liquid soaps. Valve shall be operable with one hand and with less than 5 pounds of force (22.2 N) to comply with accessible design guidelines (including ADAAG in U.S.A.). Container shall be equipped with a clear acrylic soap refill-indicator window; a locked, hinged stainless steel lid for top filling; and shall have a capacity of 40-fl oz (1.2-L). Unit shall have concealed, vandal-resistant mounting.

Surface-Mounted Soap Dispenser shall be Model B-2112 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.

GRAB BAR STRAIGHT

Gamco 150S

Sizes

48/42/36/30/24/18/12



Commercial Restroom Accessories

Technical Data

NOTE: Grab Bars 48" - 60" in length require a centerpost.
Grab Bars greater than 60" require a field splice as shown.

MATERIALS:

Tubing - Fabricated of type 304 stainless steel. Exposed surfaces polished to a #4 satin-finish.

Concealed Flange - 1/2" (13mm) deep, 11-gauge (3mm) type 304 stainless steel, 3" (76mm) in diameter furnished with 3 stainless steel set screws and one back plate. Flanges and center posts are welded to tubing.

Snap Flange - Mounting plate is 11-gauge (3mm) type 304 stainless steel, 3" (76mm) in diameter and welded to bar. Snap flange cover plate escutcheon, which is decorative only, is 22-gauge (0.8mm) type 304 stainless Steel. Mounting plates and center posts are welded to tubing. Exposed Flange - 10-gauge (3mm), type 304 stainless steel, 3" (76mm) in diameter with 3 countersunk mounting holes. Flanges and center posts are welded to tubing.

MOUNTING:

Clearance is distance between finished wall surface and inner edge of tubing. Standard clearance furnished is 1-1/2" (38mm).

Required mounting height is 33" to 36" (838 to 914mm) from center-line of grab bar to finish floor. 36" (914mm) horizontal grab bar should be installed on back wall and 42" (1067mm) horizontal grab bar installed on side wall or partition stall.

Screws (not furnished).

Safety Warning: Grab bars are no stronger than the anchors and walls to which they are attached and, therefore, must be firmly secured in order to support the loads for which they are intended.

To avoid potential injury, the building owner or maintenance personnel should remove the grab bar from service if the grab bar is not adequately secured to wall or if there is any observed damage to the weld.

SPECIFICATIONS:

Grab bars have been designed and tested to withstand 900 lbs. downward pull when properly installed. This exceeds HUD, HEW, FHA, VA, and other Federal, State, and local codes, including the Americans with Disabilities Act (ADA). Dimensions are measured from center-line to centerline of tubing, unless noted on grab bar application by circle dimensions which are from center-line of tubing to wall.

NOTES:

Custom made grab bars are available upon request. Custom made indoor or outdoor railing systems up to 1-1/4" to 1-1/2" (32 to 38mm) diameter are also available.

Straight Grab Bar shall be Model _____ (insert model number) of GAMCO Commercial Restroom Accessories, One Gamco Place, Durant, OK, 74701-1910

Bradley Toilet Accessories

Bradley Toilet Accessories

Liquid Soap / Liquid Sanitizer / Gel Sanitizer Dispenser



Model - 6A00-01

**6A00-11****Liquid Soap / Liquid Sanitizer / Gel Sanitizer Dispenser**

Model 6A00-11—Surface-Mounted Liquid Tank Type Vertical **Bradex**[®]

☒ Diplomat Series

Product Materials

BODY: Heavy gauge stainless steel with exposed surfaces in architectural satin finish. Front has matching curvature to other Bradley Diplomat washroom accessories.

WALL PLATE: ABS plastic.

RESERVOIR: reusable, cap-sealed plastic tank, holds 27 oz.

BATTERY BOX: Plastic, holds (3), "C" Alkaline batteries, not included.

INDICATOR LIGHTS: Green light = In "use" and dispensing.
Red flashing light = Low battery.

Capacity

27 oz (800 ml) of usable liquid soap, liquid hand sanitizer*, gel hand sanitizer, and/or iodine only. No pumice or abrasive solutions.

*Liquid hand sanitizer must be 70–95% ethanol solution

Operation

Place hands under spout and hold to dispense liquid (2"–3" sensing range). Sight gauge indicates refill time. Refill by unlocking lock with special key (supplied), swinging open dispenser body. Remove cap to refill internal tank.

Installation

Verify all rough-in dimensions prior to installation. Secure separate mounting bracket with mounting screws (included) at holes provided. Unlock the cover. Open and remove tank and peristaltic tube. Secure unit to wall by installing the mounting screws. Install batteries (not included). Fill and replace the tank and peristaltic tube. Close and lock the cover.

Guide Specification

Soap/Sanitizer Dispenser: Bradley Corp. Diplomat Series Model 6A00: Surface-mounted automatic soap/sanitizer dispenser, with face formed with contemporary contours, radii, and finish matching related accessories in manufacturer's designer series. Capacity is 27 oz (800 ml). Viscosity of soap or sanitizer must be between 1 cps–3,000 cps (centipoise). Dispenser accommodates liquid soap, liquid hand sanitizer, and/or gel sanitizer. If liquid hand sanitizer is used, the sanitizer will be dispensed in a pooled form (not spray or mist). Equipped with hinged cover and completely concealed mounting plate. Vandal resistant filler hole cover and sight gauge. Corrosion-resistant liquid soap/gel sanitizer valve; peristaltic tube with self contained valve/nozzle.

Overall dimensions: 4 $\frac{5}{8}$ "W x 10 $\frac{9}{16}$ "H x 4 $\frac{3}{16}$ "D.

MasterFormat Title: Commercial Toilet Accessories

MasterFormat Number: 10 28 13.13

OmniClass Title: Toilet and Bath Specialties

OmniClass Code: 23.31.25.00

Orders composed of products indicated as **Bradex**[®] will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.



Model

6A00-11

Surface-Mounted Automatic Soap/Sanitizer Dispenser

Finishes



Brushed Stainless

Product Compliance



ADA / ICC ANSI A117.1, Citation 309.3

Compatible Bradley Products


[6A20-110000 Hand Sanitizer/Soap Dispenser Stand](#)

For information on Warranties, Maintenance, and BAA/ARRA Compliance, visit our web site at:
bradleycorp.com/products/accessories/.



Dimensions

(mm)

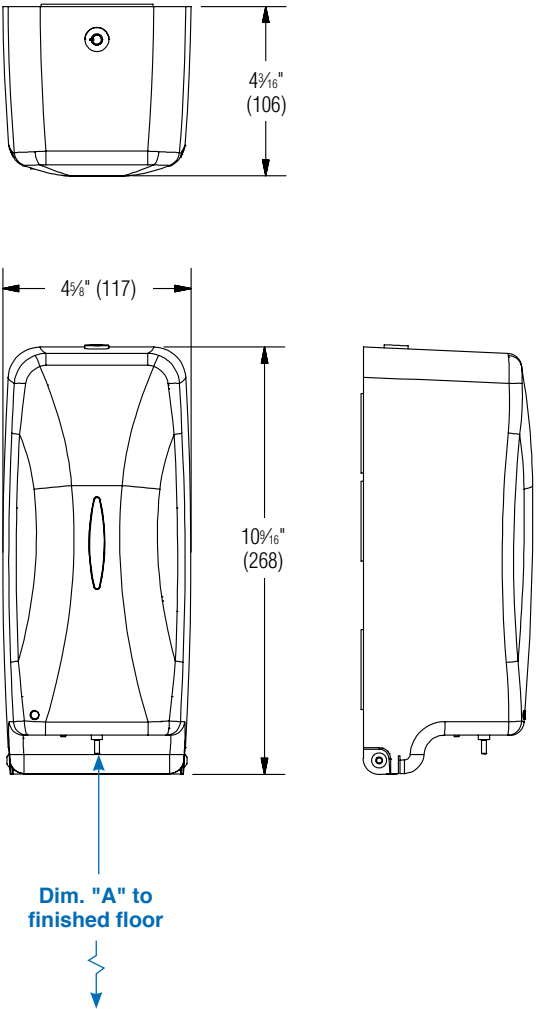

Dim. "A" Key Surface:	For Dim. "A"	Locate Top of Unit	Locate Bottom of Unit
Bottom of dispensing tube to finished floor	48" (1219)	58" (1473)	47 1/16" (1205)
	45" (1143)	55" (1397)	44 1/16" (1129)
	42" (1067)	52" (1321)	41 1/16" (1053)
	40" (1016)	50" (1270)	39 1/16" (1002)

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

781- Channel Framed Mirror



Models - 781-24x36 / 18x36



A WATTS Brand

781

Channel-Frame Mirror

Standard Model 781-1824 (18" x 24") **BradEX**

Standard Model 781-1830 (18" x 30") **BradEX**

Standard Model 781-1836 (18" x 36") **BradEX**

Standard Model 781-18362

(18" x 36", tempered glass) **BradEX**

Standard Model 781-2430 (24" x 30") **BradEX**

Standard Model 781-2436 (24" x 36") **BradEX**

Standard Model 781-24362

(24" x 36", tempered glass) **BradEX**

Standard Model 781-2448 (24" x 48") **BradEX**

Standard Model 781-2460 (24" x 60") **BradEX**

Standard Model 781-XXX

(Specify width and height)

Product Materials

FRAME: One-piece, roll-formed stainless steel with bright annealed finish. Channel is 3/4" x 3/4" x 7/16" with 90° mitered corners. Double strength continuous integral stiffener on all sides for added strength.

BACK: Galvanized steel.

MIRROR: First quality 1/4" float glass, thermosetting infrared cured paint backing with Poly-Glaze protective finish. Manufactured in accordance with ASTM C 1036 and ASTM C 1503. All edges protected by shock-absorbing, neoprene tubing. The back of the mirror is protected by a sheet of 1/4" extruded polystyrene, which is placed between the mirror and the galvanized steel.

MOUNTING BRACKETS: 18 gauge cold rolled steel.

Installation


Verify all rough-in dimensions prior to installation. Secure concealed mounting bracket to wall with screws (not included) at holes provided. Mounting kits available through Bradley (ref. #899-026). For more information, visit bradleycorp.com. Provide in-wall backing at mounting screw locations. Position mirror over mounting bracket to engage hanger tabs Slide mirror down and lock into position.

Guide Specification

Mirror shall be framed with one-piece, roll-formed stainless steel with 3/4" face and neatly mitered corners. Double -strength continuous integral stiffener on all sides. Back of unit shall be galvanized steel. Separate brackets for concealed mounting. Mirror shall be of first quality 1/4" polished float glass, guaranteed for 15 years against silver spoilage and protected by shock-absorbing, neoprene tubing with Poly-Glaze protective finish.

Framed Mirror shall be Bradley Model

781- _____ " W x _____ " H (specify width and height).

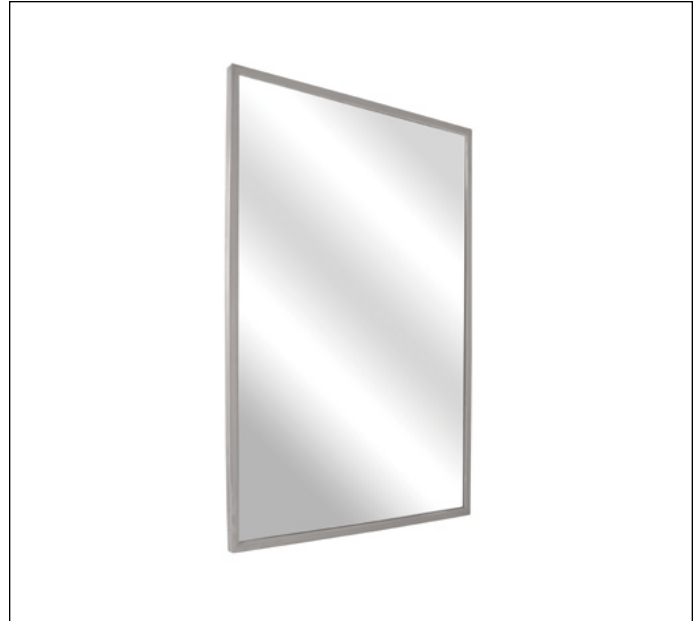

ADA Compliant

- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.

Optional Features

Features	Suffix
1/4" tempered glass mirror in lieu of polished float glass mirror*	-2
Highly polished No. 8 architectural finish, 20 gauge stainless steel in lieu of polished float glass mirror	-4

*Either the Length (L) or the Width (W) must be greater than 25".

- ☒ An inherent characteristic of a manufacturing process for tempered glass is distortion which may vary from mirror to mirror.
- ☒ Stainless steel mirrors will differ in optic quality from glass mirrors.
- ☒ In larger sizes, stainless mirrors are subject to distortion and/or "oil canning" for which Bradley Corporation cannot accept responsibility.
- ☒ Bradley mirrors are not field interchangeable from horizontal to vertical or vice versa. Always specify width first.

Orders composed of products indicated as **BradEX** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.




A WATTS Brand

781



Channel-Frame Mirror

Dimensions

MIRRORS 30" WIDE AND UNDER

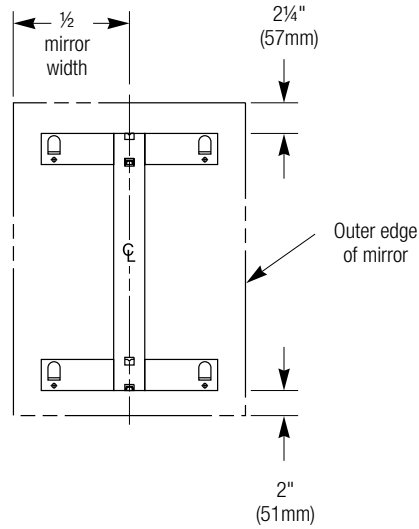

MIRRORS OVER 30" WIDE

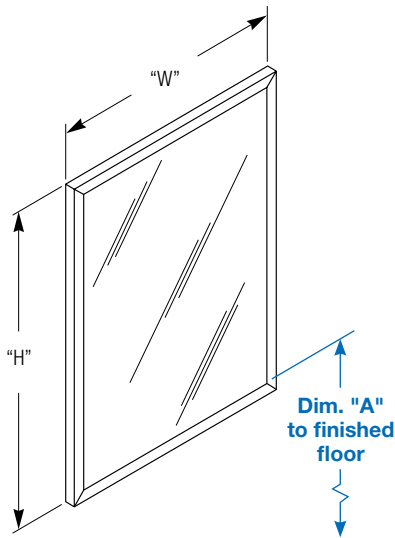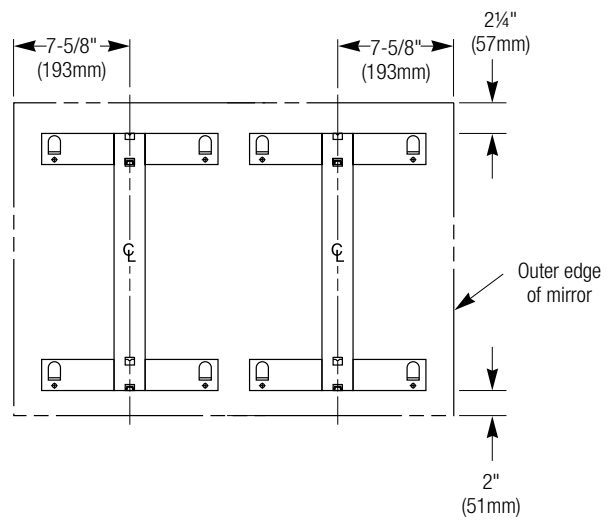

BradEX® Models

Width (Inches) W	Height (Inches) H	Overall Dimension (Inches)	Overall Dimensions (Millimeters)	Standard Model Number
18"	24"	18 x 24	457 x 610	781-1824
18"	30"	18 x 30	457 x 762	781-1830
18"	36"	18 x 36	457 x 914	781-1836
18"	36"	18 x 36	457 x 914	781-18362
24"	30"	24 x 30	610 x 762	781-2430
24"	36"	24 x 36	610 x 914	781-2436
24"	36"	24 x 36	610 x 914	781-24362
24"	60"	24 x 60	610 x 1524	781-2460
24"	48"	24 x 48	610 x 1219	781-2448
36"	36"	36 x 36	914 x 914	781-3636

Model 781 series channel-framed mirrors can be fabricated to fit a maximum size of 120"W x 72"H.

Dim. "A" Key Surface:	For Dim. "A"	Bottom of Unit
Mirror's bottom edge of the reflecting surface to finished floor	40" (1016mm)	39 1/4" (997mm)
	37" (940mm)	36 1/4" (921mm)
	34" (864mm)	33 1/4" (845mm)
Rough wall opening:		
Surface Mount:	No rough wall opening, see overall dimensions	

Orders composed of products indicated as **BradEX®** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Napkin Disposal



Model - 4781-11



A WATTS Brand

4781-11

Napkin Disposal

Model 4781-11 — Surface-Mounted

Bradex®

☒ Standard Series — Satin Finish

Product Materials

COVER: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Heavy-duty stainless steel piano hinge.

CONTAINER: 22 gauge stainless steel with exposed surfaces in architectural satin finish. All welded construction with rounded front corners.

Operation

Top opens for removal of waxed paper liner. Box of 500 waxed paper liners are available by ordering part number P11-022

Installation

Verify all rough-in dimensions prior to installation. Secure to wall or partition with mounting screws (not included) at holes provided.

Guide Specification



Surface-mounted napkin disposal shall be fabricated of 22 gauge stainless steel with exposed surfaces in satin finish. Top attached by piano hinge.

Overall dimensions: 8"W x 11-3/8"H x 4-1/4"D.

ADA Compliant

- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.

Dim. "A" Key Surface:	For Dim. "A"	Top of Unit	Bottom of Unit
Waste receptacle top lip to finished floor	40" (1016mm)	40" (1016mm)	28½" (724mm)
	36" (914mm)	36" (914mm)	24½" (622mm)
	32" (813mm)	32" (813mm)	20½" (521mm)
Rough wall opening:			
Surface Mount:	No rough opening, see overall dimensions		

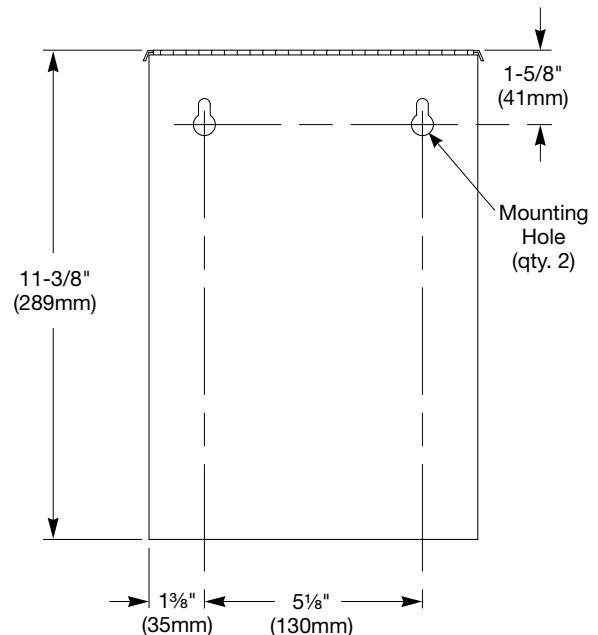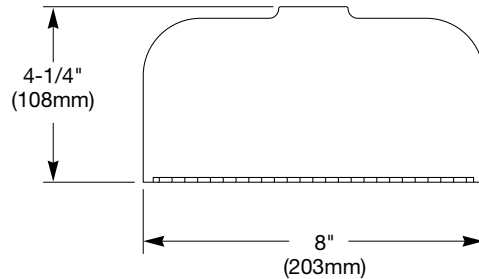

Orders composed of products indicated as **Bradex®** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Stainless Steel Single Robe Hook



Model - 9114

Paper Towel Dispenser



Model - 250-15



A WATTS Brand

250-15

Towel Dispenser

Model 250-15 — Surface-Mounted *BradEX*®

- ☒ C-Fold/Multi-Fold Towels
- ☒ Tumbler Lock

Product Materials

UNIT: 22-gauge stainless steel with exposed surfaces in architectural satin finish. Smooth corners, free of burrs and sharp edges. Tumbler lock keyed like other Bradley units. Cabinet hinged at bottom to allow easy filling. Refill indicator slot on face of cabinet. Rolled edge on dispenser opening.

Capacity

525 multi-fold or 400 C-fold paper towels.

Operation

Unit holds multi-fold or C-fold towels without use of special adapter.

Installation

Verify all rough-in dimensions prior to installation. Secure to wall with mounting screws (not included) at holes provided. Mounting kit (P18-026) available through Bradley. Visit bradleycorp.com for more information. Provide in-wall backing at mounting screw locations.

Guide Specification

Surface-mounted towel dispenser shall be fabricated of type heavy duty, 22-gauge stainless steel with exposed surfaces in satin finish. Refill indicator on face of cabinet. Tumbler lock to secure hinged front panel. Towel dispenser capacity 525 multi-fold or 400 C-fold towels.

Overall dimensions: 11"W x 15⁵/₁₆"H x 4"D.



ADA Compliant

- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.



Orders composed of products indicated as *BradEX*® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 1 of 2

12/3/2025

[View Latest Version](#)

This information is subject to change without notice.

Bradley_Dispenser_250-15


© 2025 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com



A WATTS Brand

250-15 Towel Dispenser

Dimensions

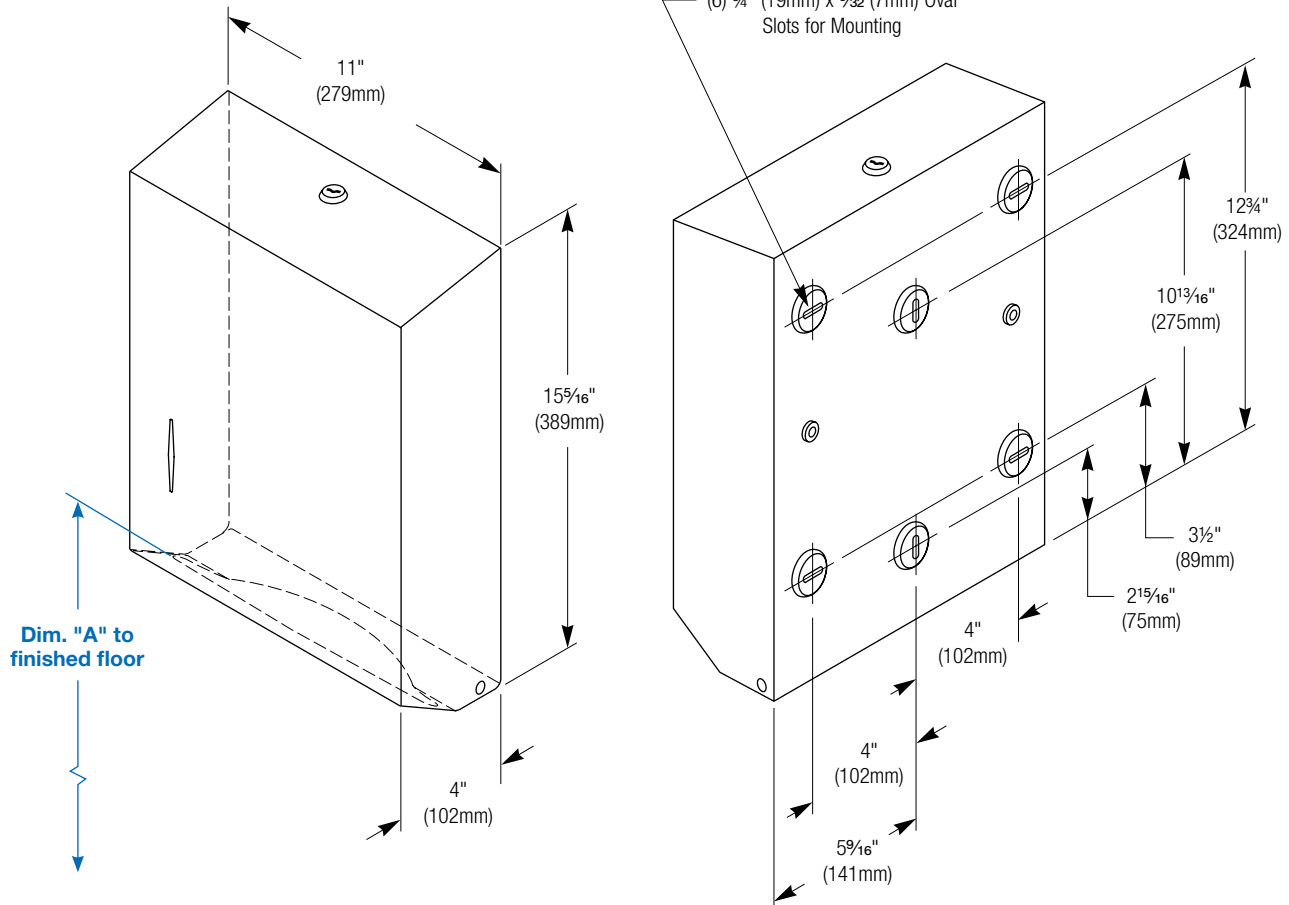

Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening
Paper towel top of opening to finished floor	48" (1219mm)	62 1/2" (1588mm)	47 3/16" (1199mm)
	45" (1143mm)	59 1/2" (1511mm)	44 3/16" (1122mm)
	42" (1067mm)	56 1/2" (1435mm)	41 3/16" (1046mm)
	40" (1016mm)	54 1/2" (1384mm)	39 3/16" (995mm)
Rough wall opening:			
Surface Mount:		No rough opening, see overall dimensions	

Orders composed of products indicated as **BradEX**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 2 of 2

12/3/2025

[View Latest Version](#)

This information is subject to change without notice.

Bradley_Dispenser_250-15

© 2025 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

Surface-Mounted Baby Changing Station



Model - 9632 - Cream

Surface-Mounted Baby Changing Station



Model - 9632-Cream



Model 963 – Gray and White Speckled **Bradex**®

Model 9631 – Light Grey **Bradex**®

Model 9632 – Cream **Bradex**®

Model 9633 – Black **Bradex**®

Product Materials

Bacterial-resistant, high density polyethylene with steel-to-steel support hinges. Pneumatic gas shock mechanism opens and closes unit smoothly. Liner dispenser and purse/diaper bag hooks molded in. ADA compliant nylon buckle is adjustable with one hand.

STRENGTH NOTE: Unit complies with ASTM F2285 Standard that requires commercial diaper changing stations be able to support a static load of up to 250 lb.

Guide Specification

Surface-mounted baby changing station shall be gray and white speckled (963), solid light grey (9631), cream (9632), or black (9633) molded bacterial-resistant, high density polyethylene. Steel-to-steel support hinges with pneumatic gas shock mechanism. Unit shall have integrated liner dispenser and bag hooks. Unit shall have an anti-microbial safety belt. Warning labels are printed in English, Spanish, French, and Braille. Unit shall be operable with less than 5 lb of force and complies with ASTM F2285 Standard.

Overall dimensions: 34-1/4"W x 15-3/8"H x 4"D.

Installation

Verify all rough-in dimensions prior to installation. Secure to wall through mounting holes. Mounting hardware for typical conditions is included.



WARNING: Be sure to use reinforced backing behind wall where mounting screws or anchoring devices are installed to ensure adequate support for the baby changing station. All anchoring devices must be appropriate for specific wall construction. Severe personal injury and/or property damage may result from improper mounting.

Service Parts Available

Part Number	Description
P15-491	Replacement Strap

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.



Product Compliance

Complies with

- ADA¹



¹ Product is ADA compliant when it opens with less than 5 lb of force and projects less than 4" from the wall when closed.



Consult local and national accessibility codes for proper installation guidelines.



Conformity and compliance to local and national codes is the responsibility of the installer.




A WATTS Brand

9632

Surface-Mounted Baby Changing Station

Dimensions

(mm)

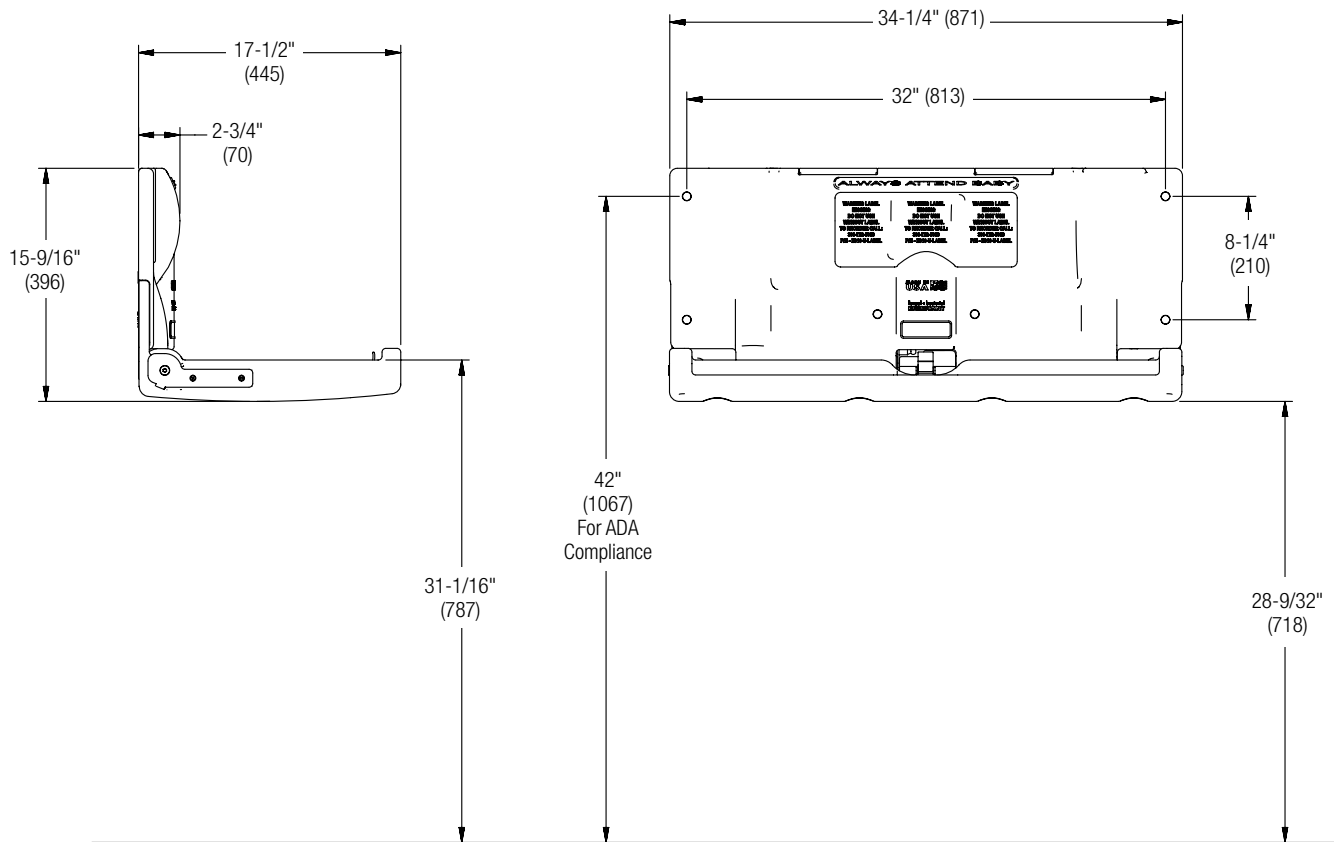

Orders composed of products indicated as **Bradex®** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 2 of 2 10/7/2024

This information is subject to change without notice.

Bradley_BabyChanger_963_31_32_33

[View Latest Version](#)

© 2024 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

Single Roll Toilet Tissue Dispenser



Model - 5054



A WATTS Brand

5054

Toilet Tissue Dispenser

Model 5054 — **Bradex**®

- ☒ Controlled Delivery
- ☒ Single Roll (For Dual Roll see Model 5224)

Product Materials

UNIT: heavy-duty satin chrome-plated steel.

Capacity

One standard core toilet tissue roll through 6" in diameter.

Operation

Remove tissue roll core to access special locking mechanism for servicing.
Tension spring controls paper delivery.


Installation

Verify all rough-in dimensions prior to installation. Secure to wall with mounting screws (included) at holes provided.

Guide Specification

Surface-mounted toilet tissue dispenser shall be heavy-duty chrome-plated steel and hold one standard core toilet tissue roll. Tension spring controls paper delivery.

Overall dimensions: 6"W x 2¾"H x 4½"D.

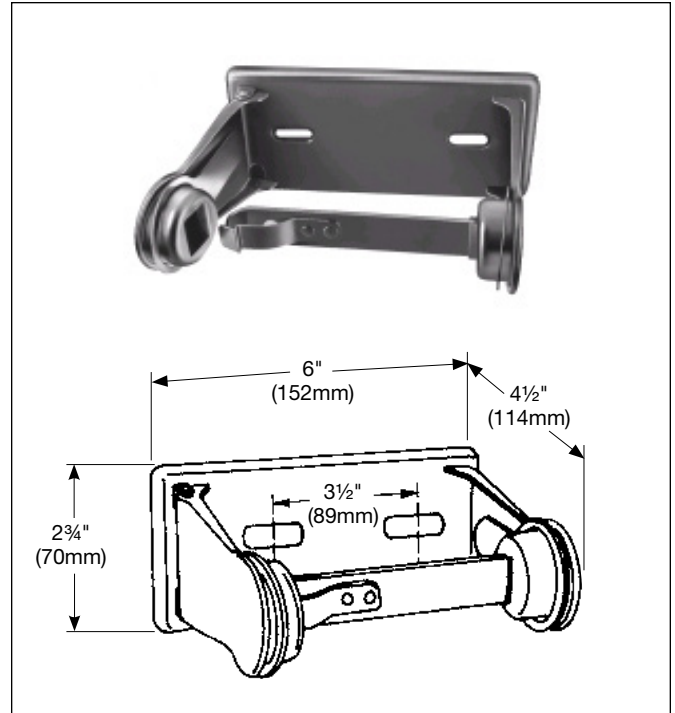

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 1 of 1
This information is subject to change without notice.
Bradley_TPDispenser_5054

1/31/2024

© 2024 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

Dual Roll Toilet Tissue Dispenser



Model - 5224



A WATTS Brand

5224

Toilet Tissue Dispenser

Model 5224 — **Bradex**®

- ☒ Controlled Delivery
- ☒ Dual Roll (For Single Roll see Model 5054)

Product Materials

UNIT: heavy-duty chrome-plated steel.

Capacity

Two standard core toilet tissue rolls through 6" in diameter.

Operation

Remove tissue roll core to access special locking mechanism for servicing.
Tension spring controls paper delivery.


Installation

Verify all rough-in dimensions prior to installation. Secure to wall with mounting screws (included) at holes provided.

Guide Specification

Surface-mounted toilet tissue dispenser shall be heavy-duty chrome-plated steel and hold two standard core toilet tissue rolls. Tension spring controls paper delivery.

Overall dimensions: 12 $\frac{3}{8}$ "W x 2 $\frac{3}{4}$ "H x 4 $\frac{5}{16}$ "D.

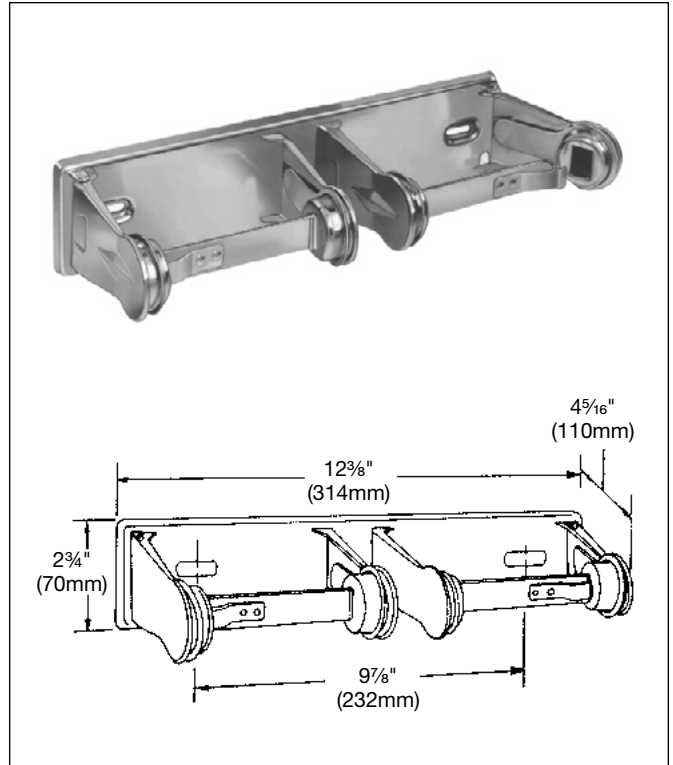

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 1 of 1
1/31/2024
This information is subject to change without notice.
Bradley_TPDispenser_5224

© 2024 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

Dual Roll Toilet Tissue Dispenser



Model - 5402

☒ Dual Roll

CABINET: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with burr-free edges.

SERVICE DOOR: 22 gauge stainless steel with exposed surfaces in architectural satin finish and tumbler lock keyed like other Bradley units. Hinged at bottom.

SPINDLES: Molded polyethylene.

Two standard core toilet tissue rolls through 5" in diameter.

Cabinet holds two rolls of 4½" x 5" standard core toilet tissue, one above the other. When first roll is used up, fresh roll automatically drops down for use. Unique retaining mechanism prevents use of spare roll until first roll is completely used. Spindles non-removable by user. Hinged door permits access to storage compartment for servicing of unit.

Verify all rough-in dimensions prior to installation. Secure to wall with mounting screws (not included) at holes provided. Mounting Kit P18-026 available from Bradley. Visit www.bradleycorp.com for more information. Provide in-wall backing at mounting screw locations.

Surface-mounted dual roll toilet tissue dispenser shall be heavy gauge satin finish stainless steel and hold two standard core toilet tissue rolls.


Overall dimensions: 5⁹/₁₆"W x 10³/₈"H x 5⁵/₁₆"D.



- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.

Orders composed of products indicated as **BradEX®** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 1 of 1
This information is subject to change without notice.
Bradley TPDispenser 5402

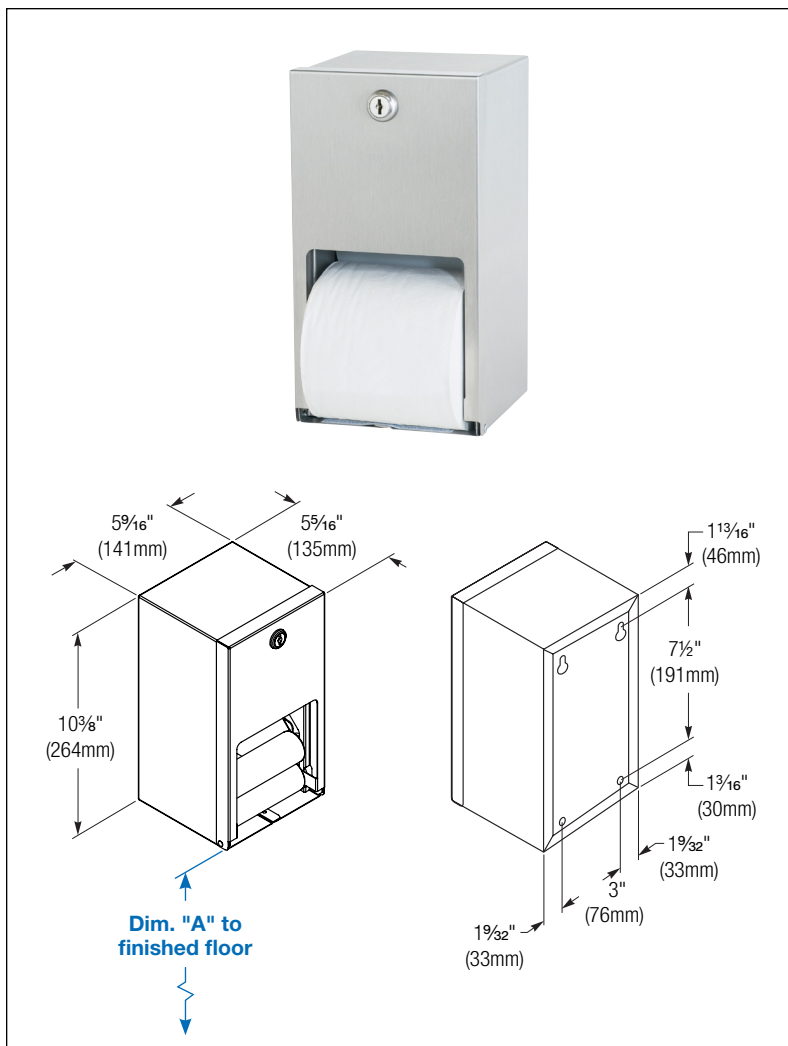

Dim. "A" Key Surface:	For Dim. "A"	Top of Unit	Bottom of Unit
Bottom of toilet paper opening to finished floor	20" (508mm)	30¼" (768mm)	19⅞" (505mm)
	19" (483mm)	29¼" (743mm)	18⅞" (479mm)
	18" (457mm)	28¼" (718mm)	17⅞" (454mm)
	17" (432mm)	27¼" (692mm)	16⅞" (429mm)
	16" (406mm)	26¼" (667mm)	15⅞" (403mm)
	15" (381mm)	25¼" (641mm)	14⅞" (378mm)
Rough wall opening:			
Surface Mount:	No rough opening, see overall dimensions		

[View Latest Version](#)

© 2024 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

Vertical Soap Dispenser



Model - 6563



A WATTS Brand

6563

Soap Dispenser

- ☒ Tank Type Vertical
- ☒ Surface-Mounted
- ☒ ADA Compliant

Bradex®

Product Materials

BODY: 20 gauge stainless steel with exposed surfaces in architectural satin finish.

BACK: 20 gauge stainless steel; heliarc welded to the body.

WALL PLATE: stainless steel.

SOAP VALVE: black ABS plastic mechanism.

Capacity

40-oz. liquid soap.

Operation

Push-in valve dispenses measured amount of vegetable or coconut oil liquid soaps, synthetic detergents, and antiseptic solutions with less than 5 lbs. of force. Sight gauge indicates refill time. Locked filler top opens with special key provided.

- ☒ Bradley liquid soap valves operate best with any vegetable oil or coconut oil hand soap having a 10–15% soap concentration.

Installation

Verify all rough-in dimensions prior to installation. Secure separate mounting bracket to wall. Slide dispenser into place and secure locking screw through filler hole.

Guide Specification

Surface-mounted liquid soap dispenser shall be fabricated of 20 gauge satin finish stainless steel. Dispenser shall have completely concealed mounting, vandal-resistant filler hole cover and sight gauge. Push-in corrosion-resistant liquid soap valve. Capacity: 40-oz. liquid soap. Requires less than 5 lbs. of force to dispense soap.

Overall dimensions: 4-13/16"W x 8-3/16"H x 2-7/8"D.

Service Kit

Soap Valve - P15-449



ADA Compliant

- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.

Orders composed of products indicated as **Bradex®** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 1 of 2

1/31/2024

This information is subject to change without notice.

Bradley_SoapDispenser_6563

© 2024 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com




A WATTS Brand

6563

Soap Dispenser

Dimensions

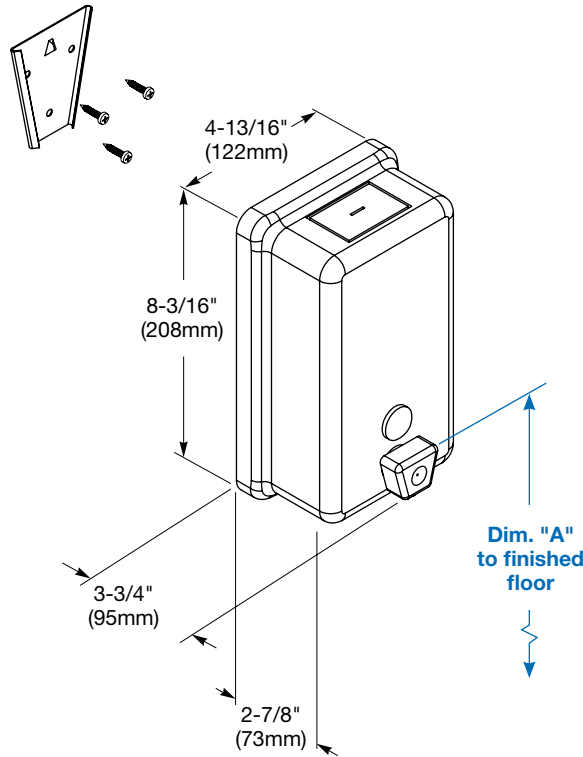

Dim. "A" Key Surface:	For Dim. "A"	Top of Unit	Bottom of Unit
Push button top to finished floor	40" (1016mm)	46¼" (1175mm)	38" (965mm)
	38" (965mm)	44¼" (1124mm)	36" (914mm)
	36" (914mm)	42¼" (1073mm)	34" (864mm)
	34" (864mm)	40¼" (1022mm)	32" (813mm)
Rough wall opening:			
Surface Mount:	No rough wall opening, see overall dimensions		

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 2 of 2
1/31/2024
This information is subject to change without notice.
Bradley_SoapDispenser_6563

© 2024 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

Horizontal Soap Dispenser



Model - 6543



A WATTS Brand

6543

Soap Dispenser

- ☒ Tank Type Horizontal **Bradex®**
- ☒ Surface-Mounted
- ☒ ADA Compliant

Product Materials

BODY: 20 gauge stainless steel with exposed surfaces in architectural satin finish.

BACK: 20 gauge stainless steel; welded to the body.

WALL PLATE: stainless steel.

SOAP VALVE: Black ABS plastic mechanism.

Capacity

40-oz. liquid soap.

Operation

Push-in valve dispenses measured amount of vegetable or coconut oil liquid soaps, synthetic detergents, and antiseptic solutions with less than 5 lbs. of force. Sight gauge indicates refill time. Locked filler top opens with special key provided.

- ☒ Bradley liquid soap valves operate best with any vegetable oil or coconut oil hand soap having a 10–15% soap concentration.

Installation

Verify all rough-in dimensions prior to installation. Secure separate mounting bracket to wall. Slide dispenser into place and secure locking screw through filler hole.

Guide Specification

Surface-mounted liquid soap dispenser shall be fabricated of 20 gauge satin finish stainless steel. Dispenser shall have completely concealed mounting, vandal-resistant filler hole cover and sight gauge. Push-in corrosion-resistant liquid soap valve. Capacity: 40-oz. liquid soap. Requires less than 5 lbs. of force to dispense soap.

Overall dimensions: 8-3/16"W x 4-13/16"H x 2-7/8"D.




ADA Compliant

- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.

Service Kit

Soap Valve - P15-449

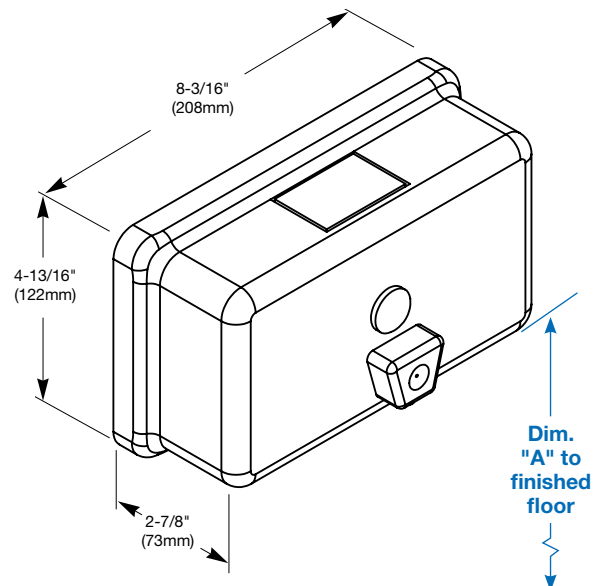

Dim. "A" Key Surface:	For Dim. "A"	Top of Unit	Bottom of Unit
Push button top to finished floor	40" (1016mm)	43¼" (1099mm)	38⅝" (975mm)
	38" (965mm)	41¼" (1048mm)	36⅝" (924mm)
	36" (914mm)	39¼" (997mm)	34⅝" (873mm)
	34" (864mm)	37¼" (946mm)	32⅝" (822mm)
Rough wall opening:			
Surface-Mount:	No rough opening, see overall dimensions		

ADA

Signs



Exit Accessible Restroom Sign - Styrene

An ADA-compliant sign made of durable, vandal-proof, high-impact, injection-molded styrene.

An economical one-piece option available in five stock colors.

Sign size: 6 inches wide x 9 inches high x 1/8 inches thick, with rounded corners of 3/4 inch radius.

Tactile graphics raised 1/32 inch above base.

Easy-to-read lettering in a high-contrast color, 5/8 inch tall+.

Grade 2 dome-shaped Braille.

Adhesive foam mounting strips included on the back to hang sign on wall.



Accessible Restroom Sign - Styrene

An ADA-compliant sign made of durable, vandal-proof, high-impact, injection-molded styrene.

An economical one-piece option available in five stock colors.

Sign size: 6 inches wide x 9 inches high x 1/8 inches thick, with rounded corners of 3/4 inch radius.

Tactile graphics raised 1/32 inch above base.

Easy-to-read lettering in a high-contrast color, 5/8 inch tall+.

Grade 2 dome-shaped Braille.

Adhesive foam mounting strips included on the back to hang sign on wall.



Men Restroom Sign - Styrene

An ADA-compliant sign made of durable, vandal-proof, high-impact, injection-molded styrene.

An economical one-piece option available in five stock colors.

Sign size: 6 inches wide x 9 inches high x 1/8 inches thick, with rounded corners of 3/4 inch radius.

Tactile graphics raised 1/32 inch above base.

Easy-to-read lettering in a high-contrast color, 5/8 inch tall+.

Grade 2 dome-shaped Braille.

Adhesive foam mounting strips included on the back to hang sign on wall.



MEN Accessible Restroom Sign - Styrene

An ADA-compliant sign made of durable, vandal-proof, high-impact, injection-molded styrene.

An economical one-piece option available in five stock colors.

Sign size: 6 inches wide x 9 inches high x 1/8 inches thick, with rounded corners of 3/4 inch radius.

Tactile graphics raised 1/32 inch above base.

Easy-to-read lettering in a high-contrast color, 5/8 inch tall+.

Grade 2 dome-shaped Braille.

Adhesive foam mounting strips included on the back to hang sign on wall.



Unisex Restroom Sign - Styrene

An ADA-compliant sign made of durable, vandal-proof, high-impact, injection-molded styrene.

An economical one-piece option available in five stock colors.

Sign size: 6 inches wide x 9 inches high x 1/8 inches thick, with rounded corners of 3/4 inch radius.

Tactile graphics raised 1/32 inch above base.

Easy-to-read lettering in a high-contrast color, 5/8 inch tall+.

Grade 2 dome-shaped Braille.

Adhesive foam mounting strips included on the back to hang sign on wall.



Unisex Accessible Restroom Sign - Styrene

An ADA-compliant sign made of durable, vandal-proof, high-impact, injection-molded styrene.

An economical one-piece option available in five stock colors.

Sign size: 6 inches wide x 9 inches high x 1/8 inches thick, with rounded corners of 3/4 inch radius.

Tactile graphics raised 1/32 inch above base.

Easy-to-read lettering in a high-contrast color, 5/8 inch tall+.

Grade 2 dome-shaped Braille.

Adhesive foam mounting strips included on the back to hang sign on wall.



Women Restroom Sign - Styrene

An ADA-compliant sign made of durable, vandal-proof, high-impact, injection-molded styrene.

An economical one-piece option available in five stock colors.

Sign size: 6 inches wide x 9 inches high x 1/8 inches thick, with rounded corners of 3/4 inch radius.

Tactile graphics raised 1/32 inch above base.

Easy-to-read lettering in a high-contrast color, 5/8 inch tall+.

Grade 2 dome-shaped Braille.

Adhesive foam mounting strips included on the back to hang sign on wall.



WOMEN Accessible Restroom Sign - Styrene

An ADA-compliant sign made of durable, vandal-proof, high-impact, injection-molded styrene.

An economical one-piece option available in five stock colors.

Sign size: 6 inches wide x 9 inches high x 1/8 inches thick, with rounded corners of 3/4 inch radius.

Tactile graphics raised 1/32 inch above base.

Easy-to-read lettering in a high-contrast color, 5/8 inch tall+.

Grade 2 dome-shaped Braille.

Adhesive foam mounting strips included on the back to hang sign on wall.

Fire Equipment


Academy Surface Cabinet 1023V10



Academy Semi Rec Cabinet 1027V10



Architectural Series, Fire Protection Cabinet, Academy - C1027V10
FE CABINET, ACADEMY, 3" RT, VERT DUO, CLR ACR, CRS TUB, ALUM DR/TRM, 10 TUB

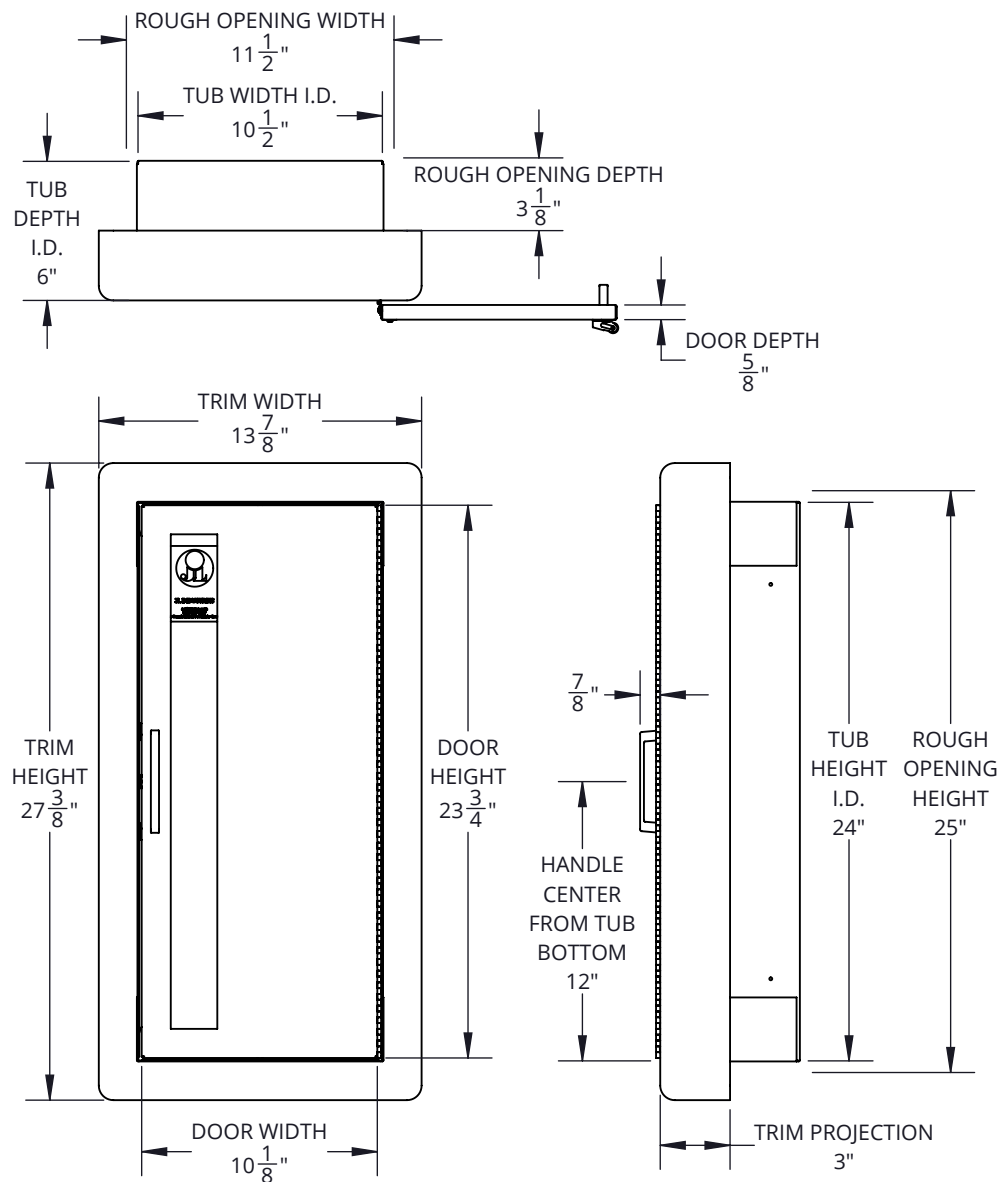

SPECIFICATIONS:

Tub Material: 24 gauge galvanized steel

Trim Material & Style: 0.050" aluminum, semi-recessed 3" rolled edge

Door Material & Style: 0.040" aluminum, vertical duo

Glazing: 0.090" clear acrylic (8-1/2" x 22-3/4")

Finish: Anodized door and trim, painted white tub

Hinge: Continuous hinge opens door 180 degrees, 20 gauge zinc plated steel

Hardware: Zinc plated pull handle, roller catch, glass clips & screws

Rough Opening: 11-1/2" x 25" x 3-1/8"

Fire Rating: Not rated

ADA Compliant: Cabinet meets 4" maximum protrusion, locate handle maximum 48" above floor

Compatible Extinguisher: Cosmic 2.5lb. - 10lb., Galaxy 2.5lb - 10lb., Mercury 2.5lb. - 5lb., Sentinel 5lb.

MODEL # BREAKDOWN:

C — Product Line: Fire protection, cabinet

10 — Tub Size: 10-1/2" x 24" x 6"

2 — Trim and Door Material: Aluminum, anodized finish

7 — Trim Style: Semi-recessed 3" rolled edge

V — Door Style: Vertical duo, pull handle, roller catch

10 — Door Glazing: 0.090" clear acrylic

REPLACEMENT PARTS:


Tub: TUB-10-PP

Trim: T-1027

Door: D-102V

Glazing: G10F10

Hardware Pack: HPFPUS

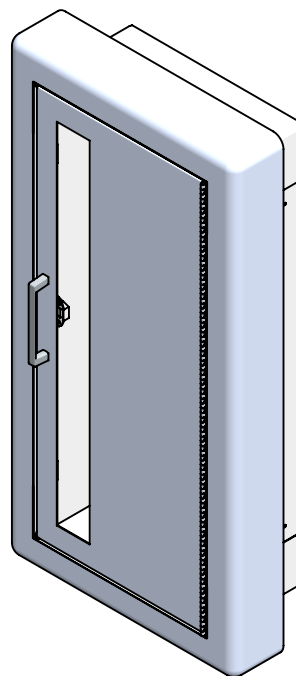

MODEL #: C1027V10



JL INDUSTRIES

800-554-6077

sales@activarcpg.com

www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

© 2024 Activar Construction Products Group, Inc.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. IS PROHIBITED.

Distributor:

Contractor:

Date:

Scale: 1:8.25

Quantity:

Pages: 1 OF 1

Project:

Approved By:

Architect:

Drawing #:

C1027V10-SUBMITTAL

REV: A 9/17/2024

Cosmic 10lb/5lb Extinguisher



SATURN 15 (50006)
Class K Wet Chemical Fire Extinguisher

Class K Wet Chemical Fire Extinguisher



DECAL, VERT. Red.FIRE EXTINGUISHER

FIRE EXTINGUISHER

Decal 'Arrow
FIRE EXTINGUISHER
Adhesive



Roof Truss Sign



9x9 Inch